

SMA Receptacle Packaged Laser Diode 664nm



Key features

- Visible light $\lambda = 664\text{nm}$
- Fibre output power 20mW
- SMA receptacle package
- Laser diode with multi-quantum well structure
- Hermetically sealed active component
- High reliability

Applications

- Fibre optic fault locators
- Test equipment
- Scientific equipment


300-0025-02 664nm SMA Receptacle Packaged Laser Diode

The 300-0025-02 664nm SMA Receptacle Packaged Laser Diode provides 20.0mW (max) fibre output power when coupled to a 50 μm fibre.

Based on a laser diode with MQW structure, the device has a laser diode reverse voltage of 2V, operating current

of 115mA, threshold current of 45mA, operating voltage of 2.6V and operating temperature range of -10°C to +60°C.

OEM applications include visible fault location and test equipment for fibre optic cables and scientific equipment.

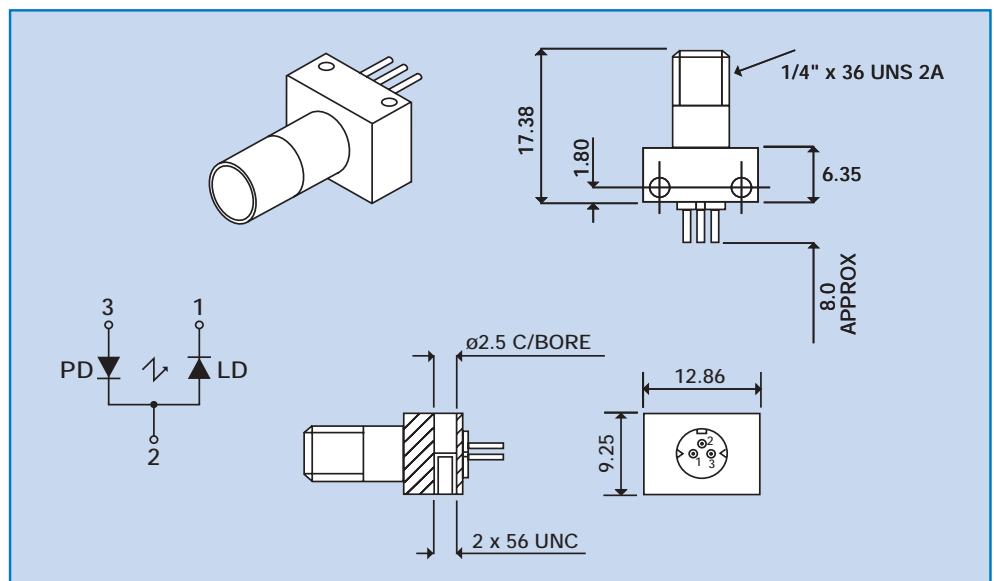

SMA Receptacle Packaged Laser Diode 664nm

300-0025-02 Specifications

Absolute Maximum Ratings (Tc = 25°C)

ITEM	SYMBOL	VALUE	UNIT
Fibre Output Power	P_f	25.0	mW
LD Reverse Voltage	V_{RLD}	2	V
Operating Temperature	T_{opr}	-10, +60	°C
Storage Temperature	T_{stg}	-40, +85	°C

Optical & Electrical Characteristics All optical data refer to a coupled 50µm MM fibre, (Tc = 25°C).


ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT	TESTING CONDITION
Fibre Output Power	P_f	15.0	20.0	25.0	mW	
Threshold Current	I_{th}	30	45	60	mA	CW
Peak Wavelength	λ	655	664	667	nm	$P_f=20mW$
Operating Current	I_{op}	-	115	135	mA	$P_f=20mW$
Operating Voltage	V_{op}	2.1	2.6	3.0	V	$P_f=20mW$

WARNING:

This laser device in operation produces visible and/or invisible laser radiation. Be sure to avoid direct exposure of human eyes to beams emitted from the laser diodes. Even though they are barely visible and/or invisible to the human eye, they can be extremely harmful. In particular, avoid looking directly into a laser diode or collimated beam along its optical axis when it is in operation. These devices are components to be used in producing a complete laser system. They do not emit radiation unless combined with other components by the end user.

NOTE: ESD precautions must be taken when handling this product.

Specifications subject to change without notice. E&OE

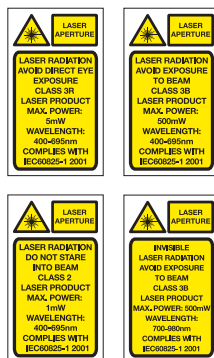

Laser Safety

The light emitted from these devices has been set in accordance with IEC60825. However, staring into the beam, whether directly or indirectly, must be avoided. IEC60825 classifies laser products into three different categories depending on light emitted, wavelength and eye safety.

CLASS II

"Caution", visible laser light less than 1.0mW. Considered eye safe, normal exposure to this type of beam will not cause permanent damage to the retina.

CLASS IIIR

"Danger", visible laser light between 1.0mW and 5.0mW. Considered eye safe with caution. Focusing of this light into the eye could cause some damage.

CLASS IIIB

"Danger", infrared (IR), and high power visible lasers considered dangerous to the retina if exposed.

NB: It is important to note that while complying with the above classifications, unless otherwise stated, our laser diode products are not certified and are designed solely for use in OEM products. The way in which the device is used in the final product may alter its original design classification, and it is the responsibility of the OEM to ensure compliance with the relevant standards.

PHOTONIC PRODUCTS UK LIMITED

Pierce Williams, Sparrow Lane
Hatfield Broad Oak, Hertfordshire CM22 7BA, UK
Telephone: +44 (0) 1279 717170
Facsimile: +44 (0) 1279 717171
E-mail: sales@photonic-products.com
www.photonic-products.com

PHOTONIC PRODUCTS USA

Telephone: +1 714-841-1960
E-mail: salesusa@photonic-products.com

PHOTONIC PRODUCTS GERMANY

Telefon: +49 (0) 8142 / 669 8364
E-mail: salesgermany@photonic-products.com
www.photonic-products.com



PHOTONIC
PRODUCTS

Issue C:03/06

laser diode solutions